

EFL253/303 /353(S/P)

2500/3000/3500kg Counterbalance Forklift



EP
Let's grow together



- Heavy duty 80 V Li-Ion battery truck designed around I/C implemented chassis
- High ground clearance and big tires for perfect handling and traction in every environment
- Great ergonomic design with spacious legroom, adjustable steering wheel and comfortable bucket seat
- High-resolution LED display installed at the upper right corner of the cabin
- Outdoor behavior with high-visibility closed roof and cabin options
- B, S, P version offering different performances to meet all kinds of applications



Manufacturer			EP	EP	EP
Model designation			EFL303	EFL303S	EFL303P
Drive			Electric	Electric	Electric
Load capacity	Q	kg	3000	3000	3000
Load center distance	c	mm	500	500	500
Service weight		kg	4280	4305	4640
Retracted mast height	h1	mm	2070	2070	2070
Lift height	h3	mm	3000	3000	3000
Height, mast extended	h4	mm	4095	4095	4095
Length to face of forks	l2	mm	2540	2540	2540
Overall width	b1/b2	mm	1210	1210	1210
Fork dimensions	s/e/l	mm	45×122×1070	45×122×1070	45×122×1070
Turning radius	Wa	mm	2347	2347	2347
Travel speed, laden/unladen		km/h	11/12	16/17	19/20
Lifting speed, laden/unladen		m/s	0.29/0.36	0.4/0.5	0.48/0.54
Lowering speed, laden/unladen		m/s	0.43/0.44	0.43/0.44	0.43/0.44
Max. gradeability, laden/unladen		%	15/15	20/25	22/28
Drive motor rating S2 60 min		kW	10	17	17
Battery voltage/nominal capacity		V/Ah	80V205AH	80V230AH	80V460AH
Energy consumption according to DIN EN 16796		kWh/h	7.15	-	8.19
Turnover output according to VDI 2198		t/h	180	-	198
Turnover efficiency according to VDI 2198		t/kWh	28.57	-	24.29

FEATURE


Higher performance for productivity boost

Max travel speed 19/20km/h to cover diverse intralogistics application needs.

Max battery capacity 80V/560Ah and max charging current 200A for longer uptime and fast charging.

Max gradeability 22/28% to deliver better stability on ramps.

Max lifting speed 0.48/0.54m/s for greater efficiency.

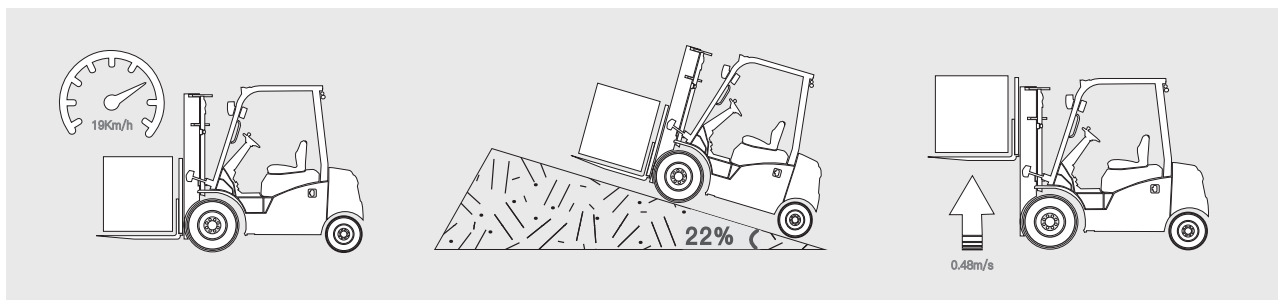

The truck structure integrates aesthetics and practical design

Both practicality and beauty are reflected in the design of the new EFL series. It inherits the robust chassis of the T8 IC truck series and features a more streamlined and compact counterweight, to better fit in confined space. Plus, the rain-proofed charging port protects the port from water splash and ensures charging safety.




Lithium technology to replace internal combustion engine

The lithium technology has proven itself as an emission-free and maintenance-free alternative to diesel. The new generation of EFL series handles loads with consistently high performance due to opportunity charging even for the most demanding applications.



Multi-functions for safe operation and easy fleet management

The new EFL series is equipped with a variety of functional configurations, such as OPS system, Telematics and card system, which not only takes security as priority but also reinforce easier fleet management.

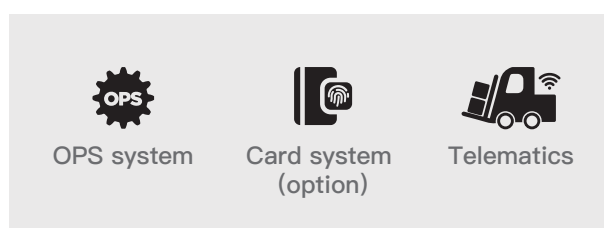

■ Ergonomic improvements for comfortable operation

The workspace of the new EFL series is more spacious with a simplified panel and a comfortable pedal. The series features a new LED display that clearly shows speed, working hours, battery status, mileage and parking status so the operator can easily grasp the truck conditions just with a glance.



New LED display

Spacious legroom


■ Joystick option available for fatigue-free work

The S/P version can be equipped with hydraulic joystick controls instead of mechanical levers. Positioned at the end of the armrest operations can be done just with fingers, increasing the operator ergonomics through the following controls: all fork hydraulic control including the 4th way, driving direction (F-N-B), horn, emergency stop button.



■ Outdoor behavior with high-visibility closed roof and cabin options

The bolted overhead guard is fitted as standard with a new closed roof made of tempered glass and flat high-strength steel bars, offering the highest visibility in the category. It enables safe load handling at all heights and increases productivity by increasing the number of pallet movements. Outdoor performance can be enhanced with cabin options such as front windshield, semi-cab, full cabin, heater and A/C. For added flexibility, the front windshield and semi cabin can be offered in a retrofit kit for easy installation by dealers.

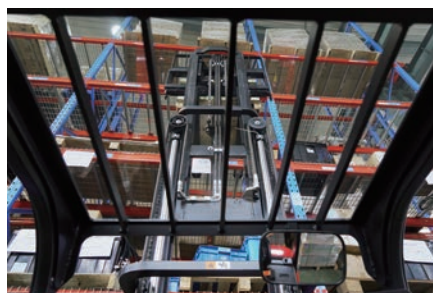

New closed roof



Full cabin



Semi-cabin retrofit kit



Dashboard with orientable heater outlet

Li-ion counterbalance forklift 2.5T

EFL253/253S/253P

Distinguishing mark	1.1	Manufacturer			EP	EP	EP
	1.2	Model designation			EFL253	EFL253S	EFL253P
	1.3	Drive			Electric	Electric	Electric
	1.4	Operator type			Seated	Seated	Seated
	1.5	Load capacity	Q	kg	2500	2500	2500
	1.6	Load center distance	c	mm	500	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	495	495	495
	1.9	Wheelbase	y	mm	1740	1740	1740
	2.1	Service weight		kg	3780	3955	4025
Service weight	2.2	Axle loading, laden front/rear		kg	5720/560	5795/660	5865/660
	2.3	Axle loading, unladen front/rear		kg	1805/1990	1865/2090	1935/2090
	3.1	Tyre type			Solid rubber	Solid rubber	Solid rubber
Tyres/chassis	3.2	Tyre size, front			7.00-12	7.00-12	7.00-12
	3.3	Tyre size, rear			18X7-8	18X7-8	18X7-8
	3.5	Wheels, number front/rear (x=drive wheels)		mm	2x/ 2	2x/ 2	2x/ 2
	3.6	Tread width, front	b ₁₀	mm	975	975	975
	3.7	Tread width, rear	b ₁₁	mm	955	955	955
	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	6/ 10	6/ 10	6/ 10
Dimensions	4.2	Retracted mast height	h ₁	mm	2090	2090	2090
	4.3	Free lift	h ₂	mm	120	120	120
	4.4	Lift height	h ₃	mm	3000	3000	3000
	4.5	Height, mast extended	h ₄	mm	4025	4025	4025
	4.7	Height of overhead guard (cabin)	h ₅	mm	2165	2165	2165
	4.8	Seat height/standing height	h ₇	mm	1095	1095	1095
	4.12	Tow coupling height	h ₁₀	mm	330	330	330
	4.19	Overall length	l ₁	mm	3600	3600	3600
	4.20	Length to face of forks	l ₂	mm	2530	2530	2530
	4.21	Overall width	b ₁ /b ₂	mm	1154	1154	1154
	4.22	Fork dimensions	s×e×l	mm	40×122×1070	40×122×1070	40×122×1070
	4.23	A,B Fork carriage class/type A, B			2A	2A	2A
	4.24	Fork carriage width	b ₃	mm	1040	1040	1040
	4.31	Ground clearance, laden, below mast	m ₁	mm	125	125	125
	4.32	Ground clearance, center of wheelbase	m ₂	mm	170	170	170
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	4000	4000	4000
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	4200	4200	4200
	4.35	Turning radius	Wa	mm	2305	2305	2305
Performance data	5.1	Travel speed, laden/unladen		km/h	11/12	16/17	19/20
	5.2	Lifting speed, laden/unladen		m/s	0.29/0.36	0.4/0.5	0.48/0.54
	5.3	Lowering speed, laden/unladen		m/s	0.43/0.44	0.43/0.44	0.43/0.44
	5.8	Max. gradeability, laden/unladen		%	15/15	20/25	22/28
	5.10	Service brake			Hydraulic	Hydraulic	Hydraulic
	5.11	Parking brake			Mechanical	Mechanical	Mechanical
Electric-engine	6.1	Drive motor rating S2 60 min		kW	10	17	17
	6.2	Lift motor rating at S3 15%		kW	16	26	26
	6.4	Battery voltage/nominal capacity		V/Ah	80V205AH	80V230AH	80V280AH
	6.6	Energy consumption according to DIN EN 16796		kWh/h	7.43	7.1	7.35
	6.7	Turnover output according to VDI 2198		t/h	135	150	165
	6.8	Turnover efficiency according to VDI 2198		t/kWh	18.64	24.15	22.39
Drive/lift mechanism	8.1	Type of drive control			AC	AC	AC
Additional data	10.5	Steering design			Hydraulic	Hydraulic	Hydraulic
	10.7	Sound pressure level at the driver's ear		dB(A)	< 74	< 74	< 74

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

Li-ion counterbalance forklift 3.0T

EFL303/303S/303P

Distinguishing mark	1.1	Manufacturer			EP	EP	EP
	1.2	Model designation			EFL303	EFL303S	EFL303P
	1.3	Drive			Electric	Electric	Electric
	1.4	Operator type			Seated	Seated	Seated
	1.5	Load capacity	Q	kg	3000	3000	3000
	1.6	Load center distance	c	mm	500	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	481	481	481
	1.9	Wheelbase	y	mm	1740	1740	1740
	2.1	Service weight		kg	4280	4305	4640
Service weight	2.2	Axle loading, laden front/rear		kg	6595/685	6575/730	6665/975
	2.3	Axle loading, unladen front/rear		kg	1900/2380	1880/2425	1970/2670
	3.1	Tyre type			Solid rubber	Solid rubber	Solid rubber
Tyres/classis	3.2	Tyre size, front			28X9-15	28X9-15	28X9-15
	3.3	Tyre size, rear			200/50-10	200/50-10	200/50-10
	3.5	Wheels, number front/rear (x=drive wheels)		mm	2x/ 2	2x/ 2	2x/ 2
	3.6	Tread width, front	b ₁₀	mm	1010	1010	1010
	3.7	Tread width, rear	b ₁₁	mm	955	955	960
	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	6/ 10	6/ 10	6/ 10
	4.2	Retracted mast height	h ₁	mm	2070	2070	2070
Dimensions	4.3	Free lift	h ₂	mm	135	135	135
	4.4	Lift height	h ₃	mm	3000	3000	3000
	4.5	Height, mast extended	h ₄	mm	4095	4095	4095
	4.7	Height of overhead guard (cabin)	h ₆	mm	2180	2180	2180
	4.8	Seat height/standing height	h ₇	mm	1110	1110	1110
	4.12	Tow coupling height	h ₁₀	mm	345	345	345
	4.19	Overall length	l ₁	mm	3610	3610	3610
	4.20	Length to face of forks	l ₂	mm	2540	2540	2540
	4.21	Overall width	b ₁ /b ₂	mm	1210	1210	1210
	4.22	Fork dimensions	s×e×l	mm	45×122×1070	45×122×1070	45×122×1070
	4.23	A,B Fork carriage class/type A, B			3A	3A	3A
	4.24	Fork carriage width	b ₃	mm	1100	1100	1100
	4.31	Ground clearance, laden, below mast	m ₁	mm	130	130	130
	4.32	Ground clearance, center of wheelbase	m ₂	mm	185	185	145
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	4028	4028	4028
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	4228	4228	4228
	4.35	Turning radius	Wa	mm	2347	2347	2347
	5.1	Travel speed, laden/unladen		km/h	11/12	16/17	19/20
Performance data	5.2	Lifting speed, laden/unladen		m/s	0.29/0.36	0.4/0.5	0.48/0.54
	5.3	Lowering speed, laden/unladen		m/s	0.43/0.44	0.43/0.44	0.43/0.44
	5.8	Max. gradeability, laden/unladen		%	15/15	20/25	22/28
	5.10	Service brake			Hydraulic	Hydraulic	Hydraulic
	5.11	Parking brake			Mechanical	Mechanical	Mechanical
Electric-engine	6.1	Drive motor rating S2 60 min		kW	10	17	17
	6.2	Lift motor rating at S3 15%		kW	16	26	26
	6.4	Battery voltage/nominal capacity		V/Ah	80V205AH	80V230AH	80V460AH
	6.6	Energy consumption according to DIN EN 16796		kWh/h	7.15	-	8.19
	6.7	Turnover output according to VDI 2198		t/h	180	-	198
	6.8	Turnover efficiency according to VDI 2198		t/kWh	28.57	-	24.29
Drive/lift mechanism	8.1	Type of drive control			AC	AC	AC
Addition data	10.5	Steering design			Hydraulic	Hydraulic	Hydraulic
	10.7	Sound pressure level at the driver's ear		dB(A)	< 74	< 74	< 74





If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.



Li-ion counterbalance forklift 3.5T

EFL353/353S/353P

Distinguishing mark	1.1	Manufacturer			EP	EP	EP
	1.2	Model designation			EFL353	EFL353S	EFL353P
	1.3	Drive			Electric	Electric	Electric
	1.4	Operator type			Seated	Seated	Seated
	1.5	Load capacity	Q	kg	3500	3500	3500
	1.6	Load center distance	c	mm	500	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	486	486	486
	1.9	Wheelbase	y	mm	1740	1740	1740
	2.1	Service weight		kg	4570	4625	5000
Service weight	2.2	Axle loading, laden front/rear		kg	7415/655	7355/770	7450/1050
	2.3	Axle loading, unladen front/rear		kg	1930/2640	1870/2755	1950/3050
	3.1	Tyre type			Solid rubber	Solid rubber	Solid rubber
Tyres/chassis	3.2	Tyre size, front			28X9-15	28X9-15	28X9-15
	3.3	Tyre size, rear			200/50-10	200/50-10	200/50-10
	3.5	Wheels, number front/rear (x=drive wheels)		mm	2x/ 2	2x/ 2	2x/ 2
	3.6	Tread width, front	b ₁₀	mm	1010	1010	1010
	3.7	Tread width, rear	b ₁₁	mm	955	955	960
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	6/ 10	6/ 10	6/ 10
	4.2	Retracted mast height	h ₁	mm	2070	2070	2070
	4.3	Free lift	h ₂	mm	135	135	135
	4.4	Lift height	h ₃	mm	3000	3000	3000
	4.5	Height, mast extended	h ₄	mm	4095	4095	4095
	4.7	Height of overhead guard (cabin)	h ₆	mm	2180	2180	2180
	4.8	Seat height/standing height	h ₇	mm	1110	1110	1110
	4.12	Tow coupling height	h ₁₀	mm	345	345	345
	4.19	Overall length	l ₁	mm	3688	3688	3688
	4.20	Length to face of forks	l ₂	mm	2618	2618	2618
	4.21	Overall width	b ₁ /b ₂	mm	1210	1210	1210
	4.22	Fork dimensions	s×e×l	mm	50×122×1070	50×122×1070	50×122×1070
	4.23	A,B Fork carriage class/type A, B			3A	3A	3A
	4.24	Fork carriage width	b ₃	mm	1100	1100	1100
	4.31	Ground clearance, laden, below mast	m ₁	mm	130	130	130
	4.32	Ground clearance, center of wheelbase	m ₂	mm	185	185	145
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	4091	4091	4091
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	4291	4291	4291
	4.35	Turning radius	Wa	mm	2405	2405	2405
Performance data	5.1	Travel speed, laden/unladen		km/h	11/12	16/17	19/20
	5.2	Lifting speed, laden/unladen		m/s	0.28/0.36	0.4/0.5	0.42/0.55
	5.3	Lowering speed, laden/unladen		m/s	0.43/0.44	0.43/0.44	0.43/0.44
	5.8	Max. gradeability, laden/unladen		%	15/15	18/25	20/28
	5.10	Service brake			Hydraulic	Hydraulic	Hydraulic
	5.11	Parking brake			Mechanical	Mechanical	Mechanical
Electric-engine	6.1	Drive motor rating S2 60 min		kW	10	17	17
	6.2	Lift motor rating at S3 15%		kW	16	26	26
	6.4	Battery voltage/nominal capacity		V/Ah	80V280AH	80V280AH	80V460AH
	6.6	Energy consumption according to DIN EN 16796		kWh/h	7.5	11.43	9.06
	6.7	Turnover output according to VDI 2198		t/h	224	217	217
	6.8	Turnover efficiency according to VDI 2198		t/kWh	30.18	22.01	27.33
Drive/lift mechanism	8.1	Type of drive control			AC	AC	AC
Addition data	10.5	Steering design			Hydraulic	Hydraulic	Hydraulic
	10.7	Sound pressure level at the driver's ear		dB(A)	< 74	< 74	< 74

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

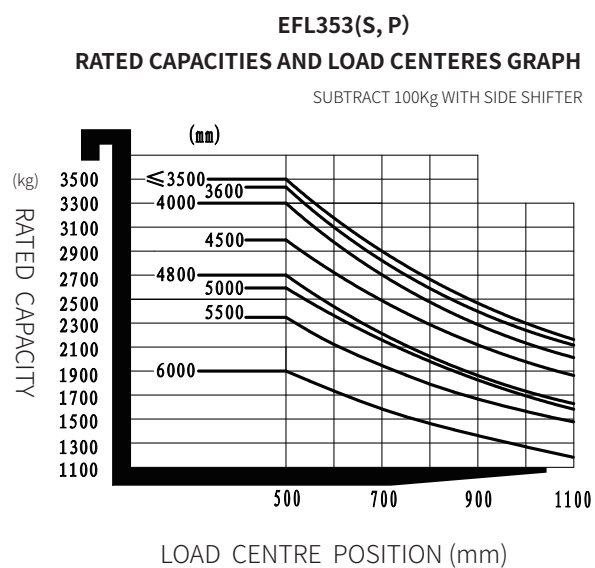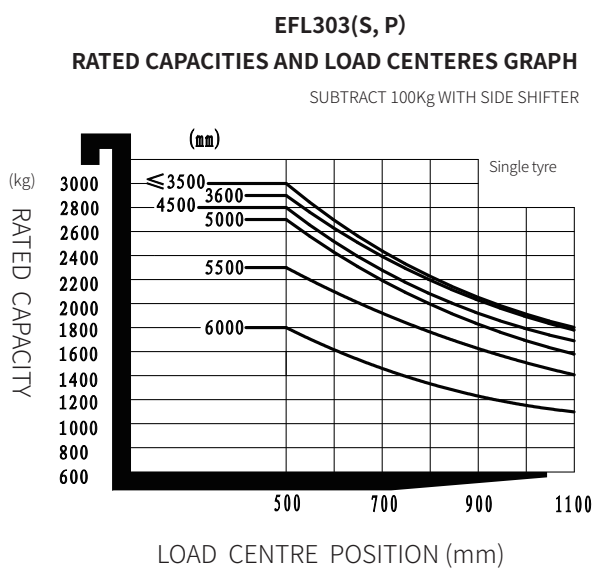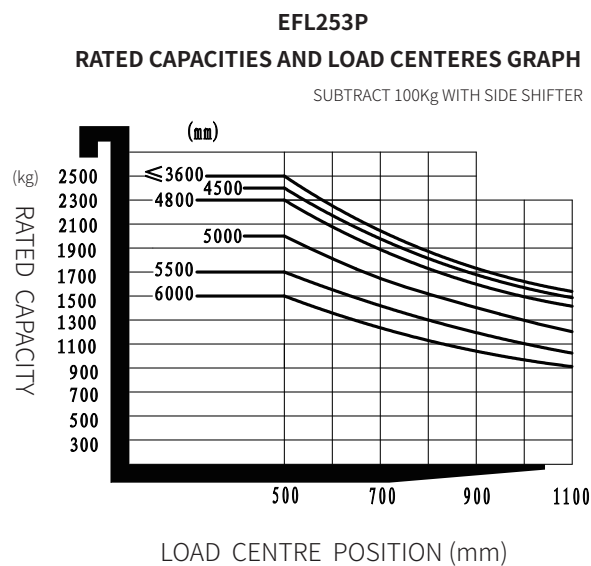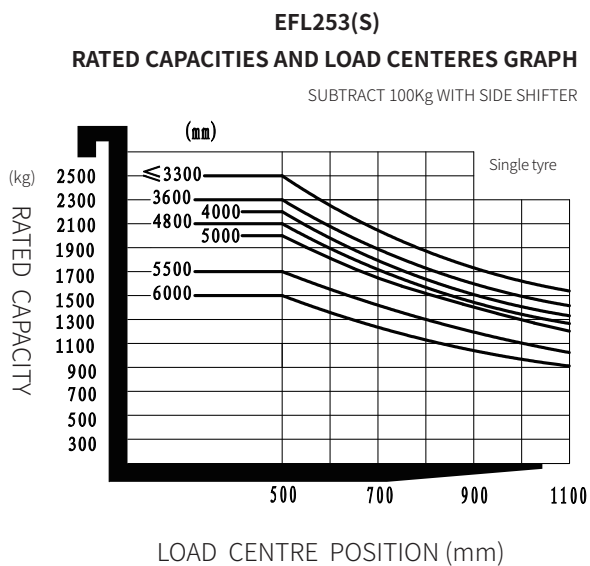

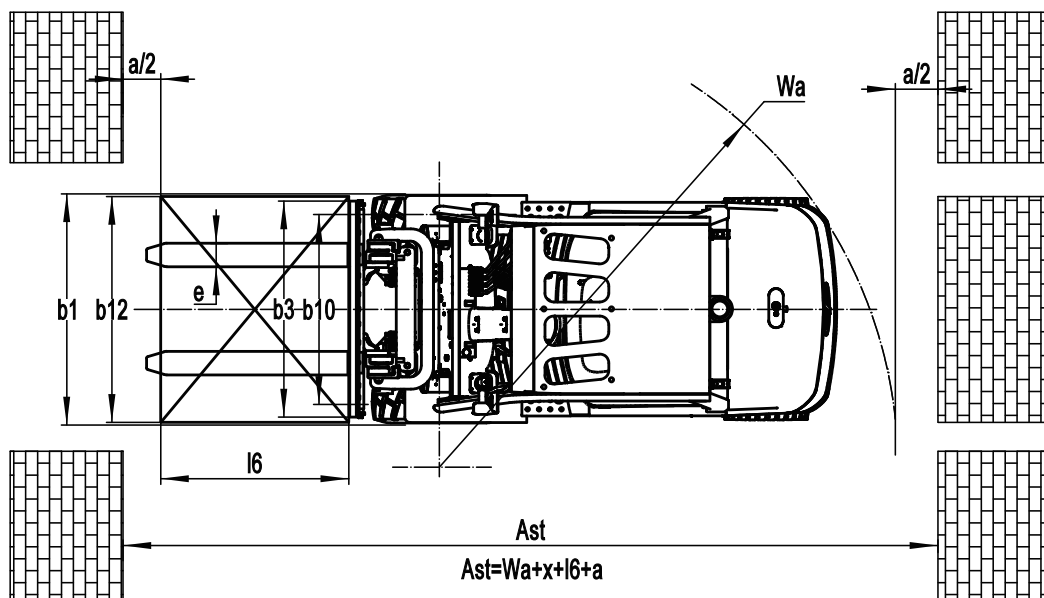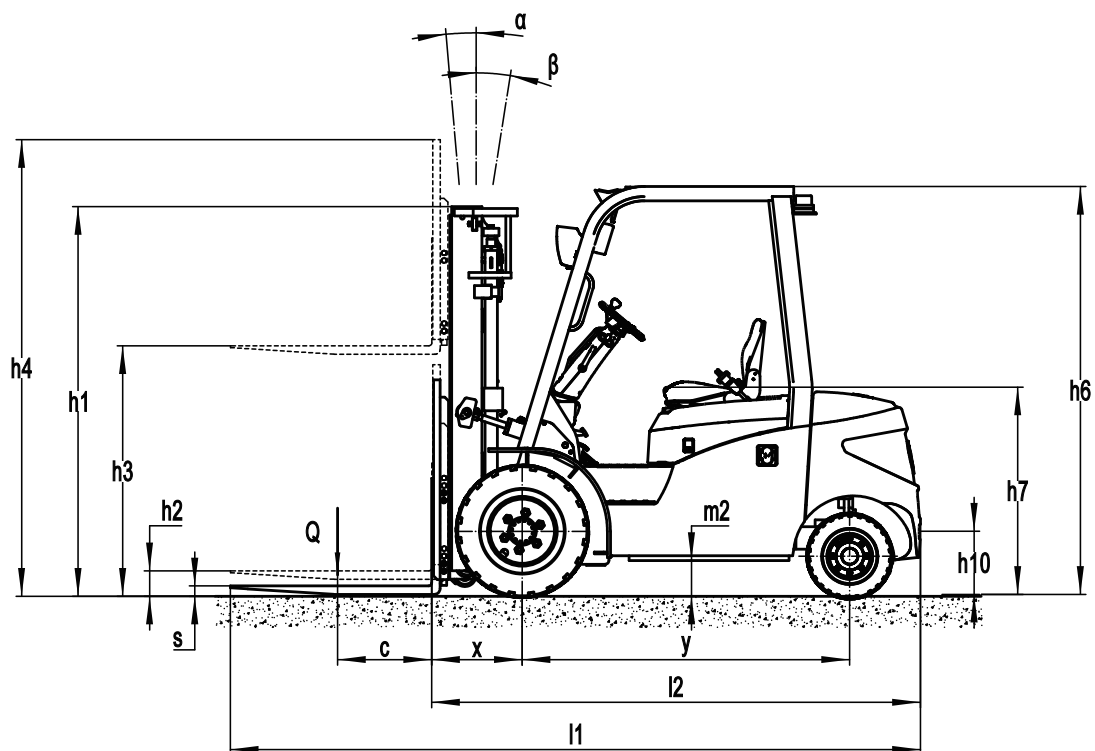

Mast Option

EFL253

	Mast types	Lift height (h3)	Height, Mast			Height,Free lift(h2)		Load distance centre of drive axle to fork X	Tilt of mast/fork carriageforward/backward		Load capacity	
			Height, mast lowered(h1)	Height, mast extended(h4)		No shelving	With shelving		α	β	500mm Load center distance	
				No shelving	With shelving						Single tyre	Double tyre
		mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg
2-Standard Mast	2W300	3000	2090	3565	4025	120	120	495	6	10	2500	——
	2W330	3300	2240	3865	4325	120	120	495	6	10	2500	——
	2W350	3500	2340	4065	4525	120	120	495	6	10	2400	——
	2W360	3600	2390	4165	4625	120	120	495	6	10	2300	——
	2W400	4000	2640	4565	5025	120	120	495	6	6	2200	——
	2W450	4500	2890	5065	5525	120	120	495	6	6	2050	——
2-Free Mast	2F300	3000	2035	3565	4025	1470	1010	476	6	10	2500	——
	2F330	3300	2185	3865	4325	1620	1160	476	6	10	2500	——
	2F360	3600	2335	4165	4625	1770	1310	476	6	10	2300	——
3-Free Mast	3F430	4300	2035	4865	5325	1470	1010	488	6	6	2200	——
	3F450	4500	2115	5065	5525	1550	1090	488	6	6	2150	——
	3F480	4800	2220	5365	5825	1655	1195	488	6	6	2100	——
	3F500	5000	2305	5565	6025	1740	1280	488	6	6	2000	——
	3F550	5500	2555	6065	6525	1990	1530	488	3	5	1700	——
	3F600	6000	2805	6565	7025	2240	1780	488	3	5	1500	——

EFL303/353

	Mast types	Lift height (h3)	Height, mast lowered(h1)	Height, Mast		Height,Free lift(h2)		Load distance centre of drive axle to fork X		Tilt of mast/fork carriageforward/backward		Load capacity		Load capacity	
				Height, mast extended(h4)	No shelving	With shelving	500mm Load center distance					500mm Load center distance			
							No shelving					With shelving	3.0t	3.5t	Single tyre
		mm	mm	mm	mm	mm	mm	mm	3.0t	3.5t	Deg	Deg	kg	kg	kg
2-Standard Mast	2W270	2700	1920	3330	3795	135	135	481	486	6	10	3000	—	3500	—
	2W300	3000	2070	3630	4095	135	135	481	486	6	10	3000	—	3500	—
	2W330	3300	2220	3930	4395	135	135	481	486	6	10	3000	—	3500	—
	2W350	3500	2320	4130	4595	135	135	481	486	6	10	3000	—	3500	—
	2W360	3600	2370	4230	4695	135	135	481	486	6	10	2900	—	3400	—
	2W400	4000	2620	4630	5095	135	135	481	486	6	10	2800	—	3300	—
	2W450	4500	2870	5130	5595	135	135	481	486	6	6	2600	—	3100	—
2-Free Mast	2F300	3000	2040	3630	4095	1410	945	481	486	6	10	3000	—	3500	—
	2F330	3300	2190	3930	4395	1560	1095	481	486	6	10	3000	—	3500	—
	2F360	3600	2340	4230	4695	1710	1245	481	486	6	10	2900	—	3500	—
3-Free Mast	3F430	4300	2040	4930	5395	1410	945	495	500	6	6	2900	—	3300	—
	3F450	4500	2120	5130	5595	1490	1025	495	500	6	6	2800	—	3000	—
	3F480	4800	2190	5430	5895	1560	1095	495	500	6	6	2750	—	2700	—
	3F500	5000	2310	5630	6095	1680	1215	495	500	6	6	2700	—	2600	—
	3F550	5500	2560	6130	6595	1930	1465	495	500	3	5	2300	—	2350	—
	3F600	6000	2810	6630	7095	2180	1715	495	500	3	5	1800	—	1900	—

Option

No.	Optional items	EFL253	EFL253S	EFL253P
1.1	Fork dimension	122*40*920122*40*1070 122*40*1150122*40*1220 122*40*1370122*40*1500 122*40*1600122*40*1700 122*40*1820122*40*1900 122*40*2000122*40*2200	122*40*920122*40*1070 122*40*1150122*40*1220 122*40*1370122*40*1500 122*40*1600122*40*1700 122*40*1820122*40*1900 122*40*2000122*40*2200	122*40*920122*40*1070 122*40*1150122*40*1220 122*40*1370122*40*1500 122*40*1600122*40*1700 122*40*1820122*40*1900 122*40*2000122*40*2200
1.4	Fork carriage width	1040mm - Yes and can be customized	1040mm - Yes and can be customized	1040mm - Yes and can be customized
1.5	Fork carriage height	1025mm - Yes and can be customized	1025mm - Yes and can be customized	1025mm - Yes and can be customized
2.4	Front wheel type	- Single - Double	- Single - Double	- Single - Double
2.5	Front wheel material	- Pneumatic - solid - Non marking	- solid - Non marking	- solid - Non marking
2.6	Rear wheel material	- Pneumatic - solid - Non marking	- solid - Non marking	- solid - Non marking
2.7	Battery capacity	80V205AH 80V280AH 80V410AH 80V460AH	80V230AH 80V460AH	80V280AH 80V460AH
2.8	Charger	80V35A external 80V65A external 80V60A external 80V100A external 80V130A external 80V150A external 80V200A external 80V35A integrated 80V60A integrated	80V35A external 80V65A external 80V60A external 80V100A external 80V130A external 80V150A external 80V200A external	80V35A external 80V65A external 80V60A external 80V100A external 80V130A external 80V150A external 80V200A external
2.9	Battery indicator	With time	With time	With time
2.10	Seat type	- Regular - Premium - Suspension - Suspension + Seatbelt logic switch - Suspension seat with armrest	- Regular - Premium - Suspension - Suspension + Seatbelt logic switch - Suspension seat with armrest	- Regular - Premium - Suspension - Suspension + Seatbelt logic switch - Suspension seat with armrest
2.11	Attachments	- No - Built-in sideshifter - External shifter - Fork positioner	- No - Built-in sideshifter - External shifter - Fork positioner	- No - Built-in sideshifter - External shifter - Fork positioner
2.13	Traction pin	Yes	Yes	Yes
2.14	Electrostatic chain	Yes	Yes	Yes
2.15	Battery and charger with heating function	- No - Yes and not customized	- No - Yes and not customized	- No - Yes and not customized
3.5	Front lamp	LED	LED	LED
3.6	Rear lamp	NoLED	NoLED	NoLED
3.7	Warning lamp	Yes	Yes	Yes
3.8	Steering lamp	Yes	Yes	Yes
3.9	Blue lamp	- No 2 front1 rear 2 front + 1 rear	- No 2 front1 rear 2 front + 1 rear	- No 2 front1 rear 2 front + 1 rear
3.10	Area warning lamp	NoRed, 1 left + 1 right	NoRed, 1 left + 1 right	NoRed, 1 left + 1 right
3.11	Rearview mirror	1 rearview mirror - Add rearview mirror on both sides	1 rearview mirror - Add rearview mirror on both sides	1 rearview mirror - Add rearview mirror on both sides
3.12	Buzzer	Yes	Yes	Yes
3.17	OPS system	NoYes and not customized	NoYes and not customized	NoYes and not customized
3.19	USB interface	Yes	Yes	Yes
3.23	Telematics	Yes and not customizedNo	Yes and not customizedNo	Yes and not customizedNo
4.3	Cabin	- NoBasic half cabin - Upgrade half cabinFull cabin	- NoBasic half cabin - Upgrade half cabinFull cabin	- NoBasic half cabin - Upgrade half cabinFull cabin
4.5	Joystick	No	NoYes and not customized	NoYes and not customized
4.9	Heater	NoYes and not customized	NoYes and not customized	NoYes and not customized
Note: ●Standard ○Optional - Inconformity				

Option

No.	Optional items	EFL303	EFL303S	EFL303P
1.1	Fork dimension	○122*45*1070○122*45*1150 ○122*45*1220○122*45*1370 ○122*45*1520○122*45*1600 ○122*45*1700○122*45*1820 ○122*45*2000○122*45*2200 ○122*45*2400	○122*45*1070○122*45*1150 ○122*45*1220○122*45*1370 ○122*45*1520○122*45*1600 ○122*45*1700○122*45*1820 ○122*45*2000○122*45*2200 ○122*45*2400	○122*45*1070○122*45*1150 ○122*45*1220○122*45*1370 ○122*45*1520○122*45*1600 ○122*45*1700○122*45*1820 ○122*45*2000○122*45*2200 ○122*45*2400
1.4	Fork carriage width	●1100mm ○Yes and can be customized	●1100mm ○Yes and can be customized	●1100mm ○Yes and can be customized
1.5	Fork carriage height	●1095mm ○Yes and can be customized	●1095mm ○Yes and can be customized	●1095mm ○Yes and can be customized
2.4	Front wheel type	●Single ○Double	●Single ○Double	●Single ○Double
2.5	Front wheel material	○Pneumatic ○solid ○Non marking	○solid ○Non marking	○solid ○Non marking
2.6	Rear wheel material	○Pneumatic ○solid ○Non marking	○solid ○Non marking	○solid ○Non marking
2.7	Battery capacity	○80V205AH ○80V280AH ○80V410AH ○80V460AH	○80V230AH ○80V460AH	○80V460AH ○80V560AH
2.8	Charger	○80V35A external ○80V65A external ○80V60A external ○80V100A external ○80V130A external ○80V150A external ○80V200A external ○80V35A integrated ○80V60A integrated	○80V35A external ○80V65A external ○80V60A external ○80V100A external ○80V130A external ○80V150A external ○80V200A external	○80V130A external ○80V150A external ○80V200A external
2.9	Battery indicator	●With time	●With time	●With time
2.10	Seat type	○Regular ○Premium ○Suspension ○Suspension + Seatbelt logic switch ○Suspension seat with armrest	○Regular ○Premium ○Suspension ○Suspension + Seatbelt logic switch ○Suspension seat with armrest	○Regular ○Premium ○Suspension ○Suspension + Seatbelt logic switch ○Suspension seat with armrest
2.11	Attachments	●No ○Built-in sideshifter ○External shifter ○Fork positioner	●No ○Built-in sideshifter ○External shifter ○Fork positioner	●No ○Built-in sideshifter ○External shifter ○Fork positioner
2.13	Traction pin	●Yes	●Yes	●Yes
2.14	Electrostatic chain	●Yes	●Yes	●Yes
2.15	Battery and charger with heating function	●No ○Yes and not customized	●No ○Yes and not customized	●No ○Yes and not customized
3.5	Front lamp	●LED	●LED	●LED
3.6	Rear lamp	●No○LED	●No○LED	●No○LED
3.7	Warning lamp	●Yes	●Yes	●Yes
3.8	Steering lamp	●Yes	●Yes	●Yes
3.9	Blue lamp	●No○2 front ○1 rear○2 front + 1 rear	●No○2 front ○1 rear○2 front + 1 rear	●No○2 front ○1 rear○2 front + 1 rear
3.10	Area warning lamp	●No○Red, 1 left + 1 right	●No○Red, 1 left + 1 right	●No○Red, 1 left + 1 right
3.11	Rearview mirror	●1 rearview mirror ○Add rearview mirror on both sides	●1 rearview mirror ○Add rearview mirror on both sides	●1 rearview mirror ○Add rearview mirror on both sides
3.12	Buzzer	●Yes	●Yes	●Yes
3.17	OPS system	●No○Yes and not customized	●No○Yes and not customized	●No○Yes and not customized
3.19	USB interface	●Yes	●Yes	●Yes
3.23	Telematics	●Yes and not customized○No	●Yes and not customized○No	●Yes and not customized○No
4.3	Cabin	●No○Basic half cabin ○Upgrade half cabin○Full cabin	●No○Basic half cabin ○Upgrade half cabin○Full cabin	●No○Basic half cabin ○Upgrade half cabin○Full cabin
4.5	Joystick	●No	●No○Yes and not customized	●No○Yes and not customized
4.9	Heater	●No○Yes and not customized	●No○Yes and not customized	●No○Yes and not customized
Note: ●Standard ○ Optional - Inconformity				

Option

No.	Optional items	EFL353	EFL353S	EFL353P
1.1	Fork dimension	122*50*1070122*50*1150 122*50*1220122*50*1370 122*50*1520122*50*1600 122*50*1700122*50*1820 122*50*2000122*50*2200 122*50*2420	122*50*1070122*50*1150 122*50*1220122*50*1370 122*50*1520122*50*1600 122*50*1700122*50*1820 122*50*2000122*50*2200 122*50*2420	122*50*1070122*50*1150 122*50*1220122*50*1370 122*50*1520122*50*1600 122*50*1700122*50*1820 122*50*2000122*50*2200 122*50*2420
1.4	Fork carriage width	1100mm - Yes and can be customized	1100mm - Yes and can be customized	1100mm - Yes and can be customized
1.5	Fork carriage height	1095mm - Yes and can be customized	1095mm - Yes and can be customized	1095mm - Yes and can be customized
2.4	Front wheel type	- Single - Double	- Single - Double	- Single - Double
2.5	Front wheel material	- Pneumatic - solid - Non marking	- solid - Non marking	- solid - Non marking
2.6	Rear wheel material	- Pneumatic - solid - Non marking	- solid - Non marking	- solid - Non marking
2.7	Battery capacity	80V280AH 80V410AH 80V460AH	80V280AH 80V460AH	80V460AH 80V560AH
2.8	Charger	80V35A external 80V65A external 80V60A external 80V100A external 80V130A external 80V150A external 80V200A external 80V35A integrated 80V60A integrated	80V35A external 80V65A external 80V100A external 80V130A external 80V150A external 80V200A external	80V130A external 80V150A external 80V200A external
2.9	Battery indicator	With time	With time	With time
2.10	Seat type	- Regular - Premium - Suspension - Suspension + Seatbelt logic switch - Suspension seat with armrest	- Regular - Premium - Suspension - Suspension + Seatbelt logic switch - Suspension seat with armrest	- Regular - Premium - Suspension - Suspension + Seatbelt logic switch - Suspension seat with armrest
2.11	Attachments	- No - Built-in sideshifter - External shifter - Fork positioner	- No - Built-in sideshifter - External shifter - Fork positioner	- No - Built-in sideshifter - External shifter - Fork positioner
2.13	Traction pin	Yes	Yes	Yes
2.14	Electrostatic chain	Yes	Yes	Yes
2.15	Battery and charger with heating function	- No - Yes and not customized	- No - Yes and not customized	- No - Yes and not customized
3.5	Front lamp	LED	LED	LED
3.6	Rear lamp	NoLED	NoLED	NoLED
3.7	Warning lamp	Yes	Yes	Yes
3.8	Steering lamp	Yes	Yes	Yes
3.9	Blue lamp	- No2 front 1 rear2 front + 1 rear	- No2 front 1 rear2 front + 1 rear	- No2 front 1 rear2 front + 1 rear
3.10	Area warning lamp	NoRed, 1 left + 1 right	NoRed, 1 left + 1 right	NoRed, 1 left + 1 right
3.11	Rearview mirror	1 rearview mirror - Add rearview mirror on both sides	1 rearview mirror - Add rearview mirror on both sides	1 rearview mirror - Add rearview mirror on both sides
3.12	Buzzer	Yes	Yes	Yes
3.17	OPS system	NoYes and not customized	NoYes and not customized	NoYes and not customized
3.19	USB interface	Yes	Yes	Yes
3.23	Telematics	Yes and not customizedNo	Yes and not customizedNo	Yes and not customizedNo
4.3	Cabin	- NoBasic half cabin - Upgrade half cabinFull cabin	- NoBasic half cabin - Upgrade half cabinFull cabin	- NoBasic half cabin - Upgrade half cabinFull cabin
4.5	Joystick	No	NoYes and not customized	NoYes and not customized
4.9	Heater	NoYes and not customized	NoYes and not customized	NoYes and not customized
Note: ●Standard ○Optional - Inconformity				