

JX0INON-CEI

JX0-30ICEI

Electric order picker



EP
Let's grow together

- Intuitive driving system and controls
- Compact size and small turning radius for usage in tightest spaces
- High capacity electric powered load tray
- Great ergonomic design with spacious operator compartment and comfortable bucket gates
- Maximum safety with automatic gate locking, operator sensors and blue spot light
- 24V Li-Ion battery option: grant efficiency, long autonomy and opportunity charging



Manufacturer			EP	EP
Model designation			JX0/JX0-30(Lead acid)	JX0/JX0-30(Li-ion)
Drive			Electric	Electric
Load capacity	Q	kg	90/110/136	90/110/136
Wheelbase	y	mm	1095	1095
Service weight		kg	800	800
Height of overhead/ guard cabin	h6	mm	1425	1425
Lift height	h3	mm	3615	3615
Height, mast extended	h4	mm	4090	4090
Overall length	l2	mm	1440	1440
Overall width	b1/b2	mm	750	750
Stand height, elevated	h12	mm	3000	3000
Turning radius	Wa	mm	1260	1260
Travel speed, laden/unladen		km/h	6/6.5	6/6.5
Lifting speed, laden/unladen		m/s	0.22/0.27	0.22/0.27
Lowering speed, laden/unladen		m/s	0.31/0.25	0.31/0.25
Max. gradeability, laden/unladen		%	5/8	5/8
Drive motor rating S2 60 min		kW	0.65	0.65
Battery voltage/nominal capacity		V/Ah	24/120	24/135

FEATURE

■ Safe and efficient assistant for order picking

The safe, practical and efficient alternative to ladder, traditional order pickers and working platform, JX0 is the perfect truck for operations in busy and confined spaces which helps minimize travelling and picking time. JX0 offers a working height of 5 meters and a picking height of 4,5 meters, suitable for high rack system in small to large warehouses.



■ Intuitive driving system and controls

Effortless, intuitive and precise driving through mini steering (left side) and driving direction and speed control (right side). Platform and load tray controls buttons are located in comfortable position. The LCD display shows battery status, driving and turning direction, hourmeter. At every start JX0 automatically regulate to straight driving direction.



■ Compact size and ergonomic design

The compact size, the effortless driving and the 180 ° steering allow JX0 to work in extremely narrow spaces in an easy and comfortable way. The spacious operator compartment and the fingertip controls make the JX0 an ergonomic machine allowing long and fatigue-free operation.



■ Safety and performance

Driving and lifting can be done simultaneously for the maximum efficiency and travelling speed is automatically regulated based on the operator lifting height. Several sensors allow for verifying the correct working position and the gate lock, and unlocking automatically based on the lifting position. JX0 comes with the blue spot light and buzzer to comply with the highest safety standard.



■ Lithium battery option available

JX0 delivers 24V/135Ah maintenance-free lithium battery option which is the suggested choice for the JX0 order picker: in combination with single-phase 24V-30A integrated charger, JX0 allows long operating time with fast opportunity charging.




Task support vehicle

JX0/JX0-30

				EP	
				EP	
				JX0/JX0-30 (Lead-acid)	
				JX0/JX0-30 (Li-ion)	
Distinguishing mark	1.1	Manufacturer			
	1.2	Model designation			
	1.3	Drive		Electric	Electric
	1.4	Operator type		Order-picker	Order-picker
	1.5	Load capacity	Q	kg	200
	1.6	Load center distance	c	mm	-
Service weight	1.8	Load distance, centre of drive axle to fork	x	mm	-
	1.9	Wheelbase	y	mm	1095
	2.1	Service weight		kg	800
	2.2	Axle loading, laden front/rear		kg	673/467
	2.3	Axle loading, unladen front/rear		kg	380/420
	2.3	Axle loading, unladen front/rear		kg	380/420
Tyres/chassis	3.1	Tyre type			Polyurethane/Solidrubber
	3.2	Tyre size, front			φ210×70
	3.3	Tyre size, rear			φ250×100
	3.4	Additional wheels (castor wheels)		mm	φ74×48
	3.5	Wheels, number front/rear (x=drive wheels)		mm	1×, 2/2
	3.6	Tread width, front	b ₁₀	mm	545
Dimensions	3.7	Tread width, rear	b ₁₁	mm	640
	4.2	Retracted mast height	h ₁	mm	1375
	4.3	Free lift	h ₂	mm	485
	4.4	Lift height	h ₃	mm	3615
	4.5	Height, mast extended	h ₄	mm	4090
	4.7	Height of overhead guard (cabin)	h ₆	mm	1425
	4.8	Seat height/standing height	h ₇	mm	285
	4.14	Stand height, elevated	h ₁₂	mm	3000
	4.15	Lowered height	h ₁₃	mm	-
	4.19	Overall length	l ₁	mm	1440
	4.20	Length to face of forks	l ₂	mm	-
	4.21	Overall width	b ₁ /b ₂	mm	750
	4.22	Fork dimensions	s×e×l	mm	-
	4.25	Fork spread	b ₃	mm	-
	4.32	Ground clearance, center of wheelbase	m ₂	mm	35
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	-
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	-
Performance data	4.35	Turning radius	Wa	mm	1260
	5.1	Travel speed, laden/unladen		km/h	6/6.5
	5.2	Lifting speed, laden/unladen		m/s	0.22/0.27
	5.3	Lowering speed, laden/unladen		m/s	0.31/0.25
	5.8	Max. gradeability, laden/unladen		%	5/8
	5.10	Service brake			Electromagnetic
Electric-engine	6.1	Drive motor rating S2 60 min		kW	0.65
	6.2	Lift motor rating at S3 15%		kW	2.2
	6.4	Battery voltage/nominal capacity		V/Ah	24/120
	6.5	Battery weight		kg	71
	6.6	Energy consumption according to DIN EN 16796		kWh/h	
	6.7	Turnover output according to VDI 2198		t/h	
Drive/lift mechanism	6.8	Turnover efficiency according to VDI 2198		t/kWh	
	8.1	Type of drive control			DC
Addition data	10.5	Steering design			Electronic
	10.7	Sound pressure level at the driver's ear		dB(A)	60
	15.1	Charger output current		A	15

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

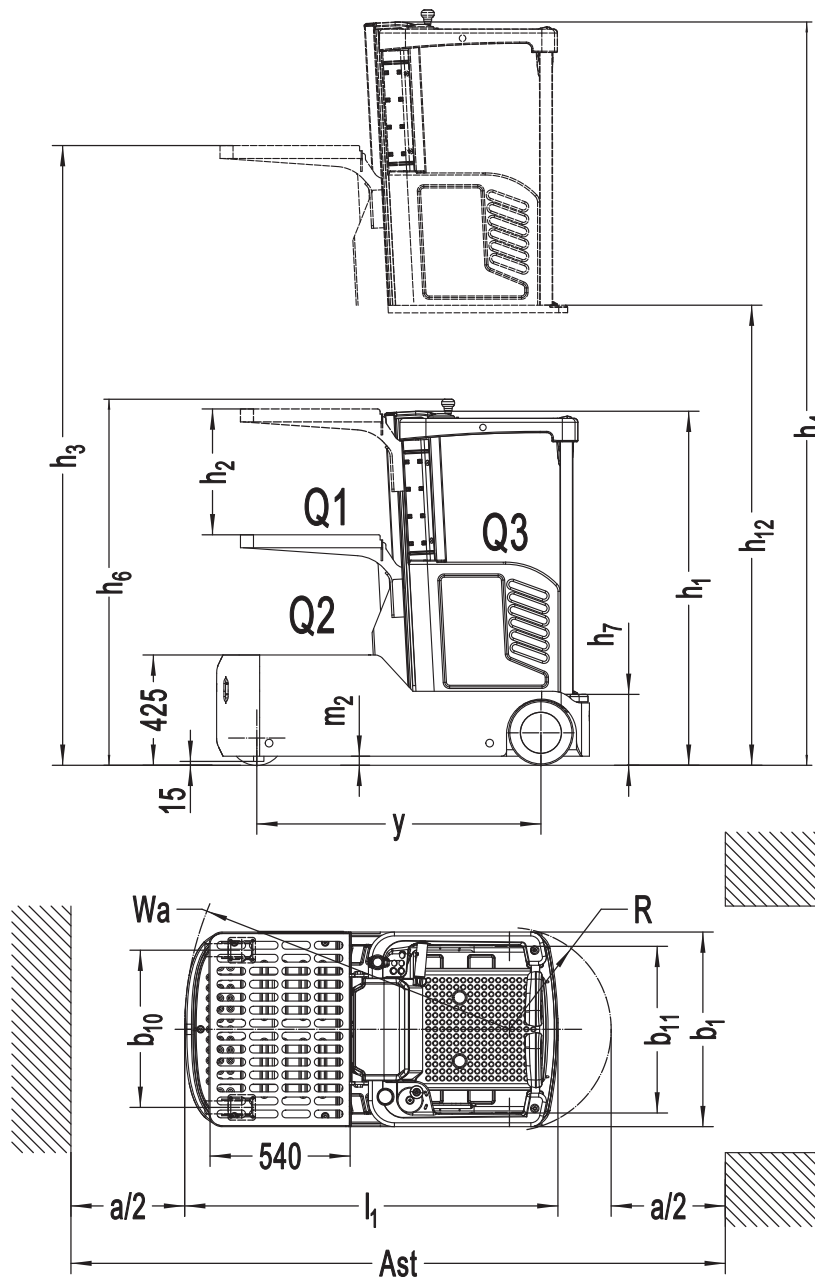

Option

No.	Optional items	JX0/JX0-30
2.1	Load wheel type	●Single
2.2	Load wheel material	●Rubber
2.3	Drive wheel material	●PU
2.7	Battery capacity	●120Ah Lead acid battery ○135Ah Li-ion battery
2.8	Charger	●24V-15A integrated charger for Lead acid battery ○24V-30A integrated charger for Li-ion battery
2.9	Battery indicator	●With time
2.14	Electrostatic chain	●No
3.3	Castor wheels	●Yes and not customized
3.9	Blue lamp	●Front blue lamp
3.12	Buzzer	●Drop buzzer ○Running buzzer ○Reversing buzzer
3.18	Guide wheel	●No ○Yes and not customized
3.20	Step on the safety switch with both feet	●No ○Yes and not customized
4.7	Overhead guard	●No

Note: ●Standard ○ Optional - Inconformity