

EFL503

HIGH CAPACITY ELECTRIC COUNTERBALANCED FORKLIFT 5T

 3000 mm  96 V Li-Ion



Perfect for steel handling, construction materials, and heavy logistics, the EFL503 delivers dependable power and extended runtime for long shifts. Its strong frame, heavy-duty axles, and durable mast design make it the ideal electric replacement for diesel forklifts in demanding environments.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Li-Ion
Battery nominal capacity		Ah	560
Battery voltage		V	96
Load centre distance	c	mm	500
Service weight		kg	7350
Retracted mast height	h ₁	mm	2250
Lift height	h ₃	mm	3000
Height, mast extended	h ₄	mm	4177/3835
Overall length		mm	4130
Overall width	b ₁ /b ₂	mm	1495
Length to face of forks	I ₂	mm	3060
Fork dimensions	s/e/l	mm	55x150x1070
Turning radius		Wa	2730
Operator type			Seated
Load distance, centre of drive axle to fork		mm	550
Wheelbase		mm	2000

Features

High Performance: High speed and high gradeability

High-voltage Li-ion batteries enable more power delivery to motors, improving acceleration and travel speeds for high-capacity trucks. PMSMs complement this with rapid response times, swiftly reaching required speeds and torques. This combination of PMSM and high voltage can provide stable and strong power output, which further gives high-capacity trucks excellent climbing capabilities ensuring that the forklift can cope with various applications with ease.

The high-voltage model offers a 1.5-2 times performance improvement over the low-voltage model. Taking the 10-ton model as an example:

100% improvement in travel speed for high voltage models in laden and unladen conditions.

The high-voltage model demonstrates a 45% faster lifting speed.

100% improvement in gradeability when unladen, 45% improvement when laden for high voltage models.

Energy Efficiency: extended runtime and fast charging

High-voltage Li-ion batteries have high energy density and can store more electrical energy within a compact volume. High-voltage systems consume less energy and provide longer battery running time comparing low-voltage systems. Notably, these high-voltage Li-ion batteries boast an impressive cycle life of up to 4000 cycles, ensuring long-term durability and minimizing the need for battery replacements.

The PMSMs incorporate advanced control technology to optimize motor efficiency. Unlike traditional AC motors, PMSMs have higher energy conversion efficiency and reduce energy waste. This means that high-capacity trucks can work continuously for prolonged hours at lower costs.

Equipped with fast charging capabilities, high-capacity trucks offer a remarkable charging experience. The high-voltage models are compatible with vehicle-grade charging stations and support 1C charging rating, allowing them to be fully charged in as fast as 1-1.2 hours. This minimizes downtime and maximizes productivity, making it ideal for multi-shift operations

Lithium batteries present considerably lower charging costs than fuel expenses. The integration of high-voltage and PMSM technology achieves up to 15% greater electricity savings versus traditional lithium and AC technology configurations. This significantly reduces long-term energy consumption costs.



Safety Assured: Battery, motor protection, monitoring and mast buffering

Both high-voltage lithium batteries and PMSM employ multiple protective measures to ensure safe operations including overcharge protection, over-temperature monitoring, short-circuit protection, etc. minimizing the risk of potential hazards and maximizing operational safety.

The central controlling module- VCU (Vehicle Control Unit) extends the safety of the high-voltage forklifts. VCU provides precise control and real-time monitoring of critical parameters to ensure the truck operates within safe limits.

It also features turn speed control, which adjusts the forklift's speed based on the turning angle, ensuring stability during turns. An over-speed alarm alerts the operator if the forklift exceeds the safe speed limit.*

The high-capacity forklift mast is equipped with a hydraulic buffering system that ensures smooth lifting and lowering of loads. With controlled deceleration, the fork movement is smooth with no abrupt stops that could damage the load or cause operator discomfort. This feature enhances operational safety and prolongs the lifespan of the mast components.



Low maintenance: Longer battery life span

Operating at a higher voltage allows the battery to be designed with fewer individual cells. With fewer components and a simpler design, the risk of battery failure is lowered.

Thanks to advanced BMS (Battery Management System) which helps to regulate and monitor high-voltage battery, these batteries tend to have a longer life than low-voltage lithium batteries, reducing the need of battery replacement.

The brushless, simple rotor design of PMSM eliminates mechanical wear from brushes and commutators. This durable, low-friction construction requires minimal periodic maintenance, reducing associated labor costs and downtime.

Strong adaptability adaptable to harsh outdoor weather conditions

Experience uninterrupted productivity through rain, puddles, and damp conditions with the overall IPX4 rating. Plus an exceptional IP67 rating for high-voltage components. Engineered to withstand harsh temperature, high-capacity trucks offer an ambient temperature range of -20 °C ~40 °C allowing them to perform no matter climate.

Battery heating when charging comes as a standard function for high capacity models, which is activated when the surrounding temperature is below zero to always offer an optimal temperature range for efficient and safe charging even in cold weather conditions.



The dual front wheels is a standard configuration on several models offering a wider base of support, which greatly improves the forklift's stability. Considering the capacity loads of the high-capacity trucks, the weight of the load is more evenly distributed across a larger surface area. The increased ground contact area provided by the dual wheels enhances traction. This is particularly beneficial in environments where the floor may be slippery or uneven while operating outdoors, ensuring that the forklift can maintain a firm grip and operate safely. This not only helps in maintaining balance but also minimizes the stress on individual tires, extending the lifespan of the tires.


VDI Chart



	SPECIFICATION	REF	UNIT	VALUE
1.4	Operator type			Seated
1.6	Load centre distance	C	mm	500
1.8	Load distance, centre of drive axle to fork		mm	550
1.9	Wheelbase		mm	2000
2.1	Service weight		kg	7350
2.2	Axle loading, laden front/rear		kg	11064/1286
2.3	Axle loading, unladen front/rear		kg	3439/3911
3.1	Tyre type			pneumatic
3.2	Tyre size, front			300-15-20PR
3.3	Tyre size, rear			7.00-12-12PR
3.5	Wheels, number front/rear (x=drive wheels)			2x/ 2

SPECIFICATION		REF	UNIT	VALUE
3.6	Tread width, front	b ₁₀	mm	1176
3.7	Tread width, rear	b ₁₁	mm	1190
4.1	Tilt of mast/fork carriage forward/backward		°	6/12
4.12	Tow coupling height		mm	640
4.19	Overall length		mm	4130
4.2	Retracted mast height	h ₁	mm	2250
4.20	Length to face of forks	I ₂	mm	3060
4.21	Overall width	b ₁ /b ₂	mm	1495
4.22	Fork dimensions	s/e/l	mm	55x150x1070
4.23	A,B Fork carriage class/type A, B			3A
4.24	Fork carriage width		mm	1380
4.3	Free lift		mm	155
4.31	Ground clearance, laden, below mast		mm	150
4.32	Ground clearance, centre of wheelbase		mm	180
4.34.1	Aisle width for pallets 1000×1200 crossways		Ast	4550
4.34.2	Aisle width for pallets 800×1200 lengthways		Ast	4550
4.35	Turning radius		Wa	2730
4.4	Lift height	h ₃	mm	3000
4.4.1	Max lift height		mm	7000
4.5	Height, mast extended	h ₄	mm	4177/3835
4.7	Height of overhead guard (cabin)		mm	2400
4.8	Seat height/standing height		mm	1290
5.1	Travel speed, laden/unladen		km/h	24/25
5.10	Service brake			Hydraulic
5.11	Parking brake			Mechanical
5.2	Lifting speed, laden/unladen		m/s	0.38/0.48
5.3	Lowering speed, laden/unladen		m/s	0.41/0.42
5.8	Max. gradeability, laden/unladen		%	24/26
6.1	Drive motor rating S2 60 min		kW	30
6.2	Lift motor rating at S3 15%		kW	27.8
6.4	Battery nominal capacity		Ah	560
6.4	Battery voltage		V	96
6.4.1	Battery type			Li-Ion
6.5	Battery weight		kg	473

	SPECIFICATION	REF	UNIT	VALUE
8.1	Type of drive control			PMSM
10.5	Steering design			Hydraulic

VDI Drawing

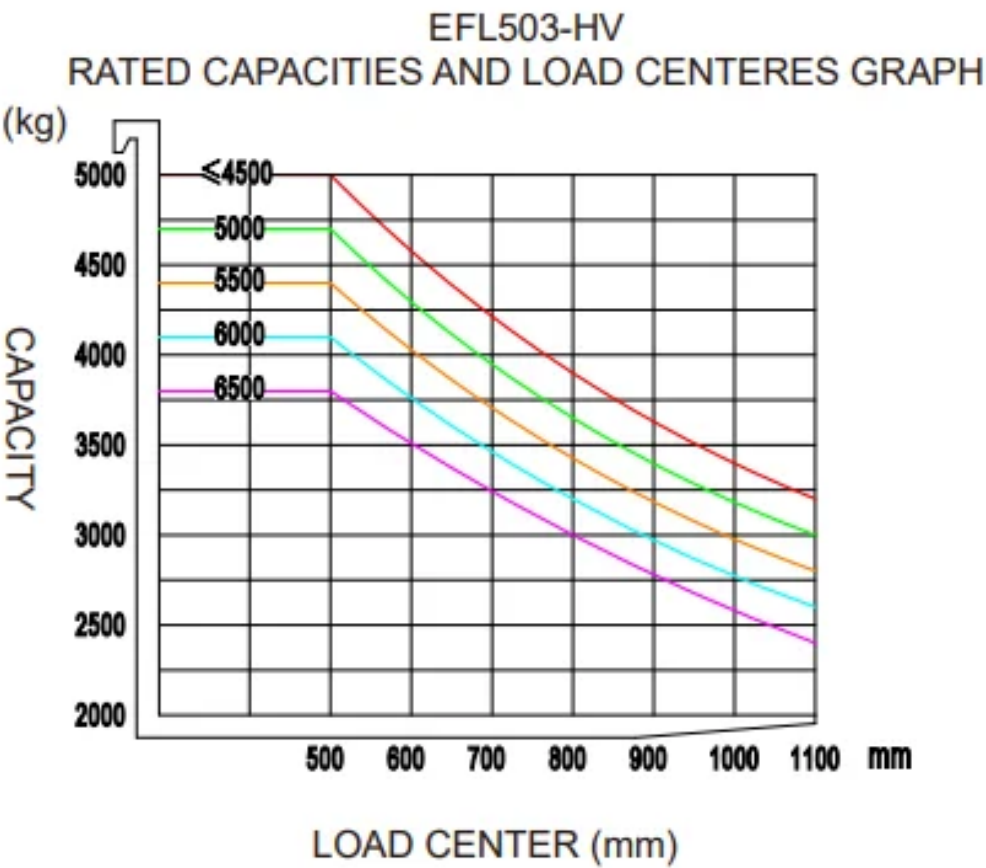

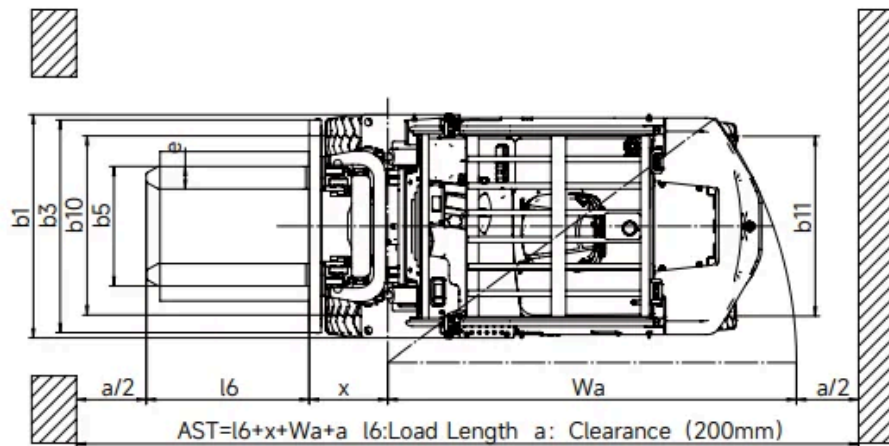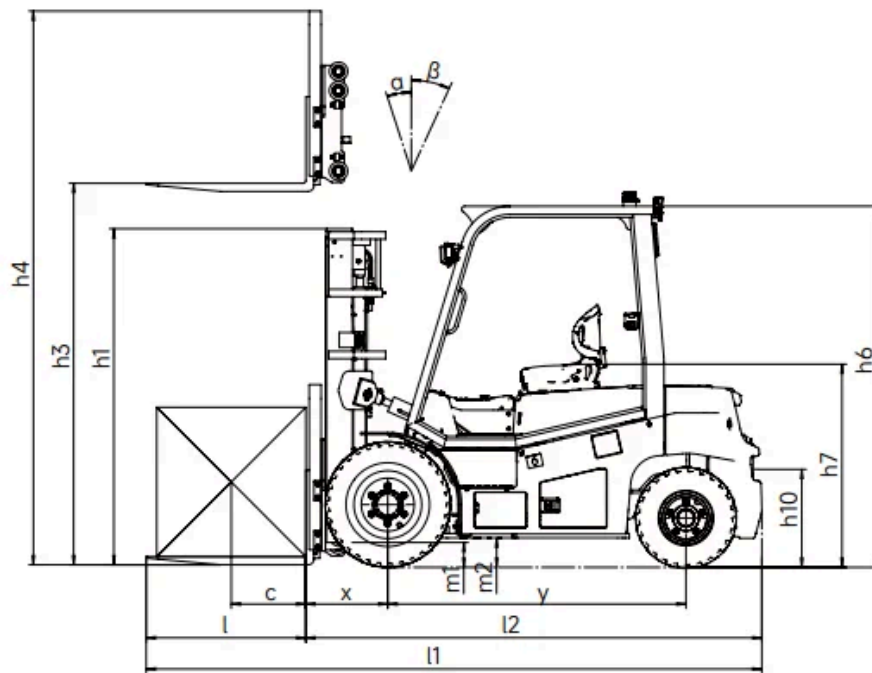

Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
2-Standard Mast	3000	2250	3835	4177	155	155
2-Standard Mast	3500	2500	4335	4677	155	155
2-Standard Mast	4000	2750	4835	5177	155	155
2-Standard Mast	4500	3050	5385	5677	155	155
2-Standard Mast	5000	3300	5885	6177	155	155

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
2-Standard Mast	5500	3600	6435	7177	155	155
2-Standard Mast	6000	3850	6935	7177	155	155
2-Standard Mast	6500	4150	7485	7677	155	155
2-Free Mast(Tentative)	3000	2250	-	4244	860	1364
2-Free Mast(Tentative)	3500	2500	-	4744	1110	1614
2-Free Mast(Tentative)	4000	2750	-	5244	-	-
3-Free Mast	4500	2247	5242	5677	1530	1096
3-Free Mast	5000	2413	5742	6177	1697	1263
3-Free Mast	5500	2580	6242	6677	1864	1430
3-Free Mast	6000	2797	6792	7177	2031	1647
3-Free Mast	6500	2963	7292	7677	2198	1814
3-Free Mast	7000	3130	7792	8177	2365	1981

Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	1070mm forks (500mm LC) /1220mm forks (600mm LC) Customized fork length/non-standard accessories Hook-on forks
Fork carriage width option	1424mm Customized fork carriage width
Backrest height	Fork backrest with hook on type fork Customized fork backrest
Seat type	Grammer MSG65-531 mechanical suspension seat with armrest + safety belt switch Upgrade mechanical suspension seat with armrest + headrest + safety belt switch
Attachments	Hook-on sideshifter Hook-on fork positioner with sideshifter Fork positioner: Pin-type forks
Battery capacity	309V173Ah LFP battery
Charger	20kw (3 phase AC 370V-460V, 50-60HZ, 32A plug) 40kw (3 phase AC 370V-460V, 50-60HZ, 63A plug)
Buzzer	Yes
Camera	Reversing radar/reversing camera/reversing radar and camera

ITEM	OPTIONS (optional items marked in yellow)
OPS system	Yes
USB interface	USB interface 24V
Telematics	Yes
Cabin	Basic half-cabin: front windshield, front wiper (including sprinkler), roof Upgrade half-cabin: basic half-cabin, rear windshield, rear wiper Basic full cabin: upgrade half-cabin, left and right doors, defogging device Upgrade full cabin: basic full cabin, air conditioner
Overhead guard	Standard overhead guard
Turn speed control	Optional
Heating system during lithium battery charging	Yes
Rear armrest horn	Yes
Mast lifting and lowering buffer	Yes
Lighting package	LED front working light, turn signal light, market light, LED rear working light, strobe warning light LED working lights on mast Rotating warning light / rotating buzzer warning light Rear/rear and front blue lamp Front fog light Customized area warning light
Mechanical lever	Yes
Options	Solid tyres / non-marking tyres Cigarette lighter socket 12V5A Adjustable overspeed alarm